

Hand Pallet Truck

Stainless or Galvanised Hand Pallet Truck

The stainless and galvanised hand pallet truck is produced for the food industry and is satisfying all demands to hygiene.

On the stainless hand pallet truck the frame, handle, axle, bolts and pins are in stainless, while the bars, front/rear rocker arm are in galvanised.

On the galvanised hand pallet truck, the frame, handle, bars, front/rear rocker arms are galvanised and axle, bolts and pins are in stainless.

That means, that the hand pallet trucks can resist the most obnoxious chemicals, such as salt and cleansing agent.

The stainless and galvanised hand pallet truck have in likeness to the painted a simple and reliable hydraulic system with built-in automatic neutral position valve.

Option

The stainless and galvanised hand pallet truck can be supplied with a parking brake.



The hand pallet truck can also be delivered in galvanised



Mounted with bogie or single roller with grease nipples



Can be supplied with nylon, polyurethane, rubber or vulkollan steering wheels



The pump unit are zink sprayed and painted afterwards



Specifications

Tiller arm

The relief hand lever is integrated in the tiller arm, which also functions as a pump arm. The relief lever controls the lowering valve and hence the lowering speed, which will vary proportionally with the movement of the relief lever. When the tiller arm is released it will automatically return to a vertical position.

Hydraulic System

The manually operated lift pump is simple and reliable in operation. The hard chromed, polished pistons are resistant to rust, scratches and strokes. The pump is double sealed which secures efficiently against leakages and prolongs the life of the seals. The lift cylinder is welded directly onto the pump, and the oil reservoir is welded around the lift cylinder. This means efficient tightness and eliminates tube and hose connections. The hand pallet truck is equipped with a neutral position valve as standard. When the tiller arm is moved slowly, the neutral position ensures that the load is not lifted (driving position). When the tiller arm is moved a little faster, the load is lifted the usual way (lifting function). The system is simple, adjustable and reliable in operation.


Wheels

The steering wheels of all models can turn 110 degree to either side. They are suspended in an articulating shaft, which ensures that all 3 wheel sets have full road contact. The entry wheels are facilitating cross entering in pallets with bottom boards.

Special Versions

The hand pallet truck can be tailored with the following possibilities:

- Minimum fork length: 400 mm
- Maximum fork length: 3000 mm
- Minimum outside fork spread: 320 mm
- Maximum outside fork spread: 1500 mm
- Sloping forks for handling of paper rolls

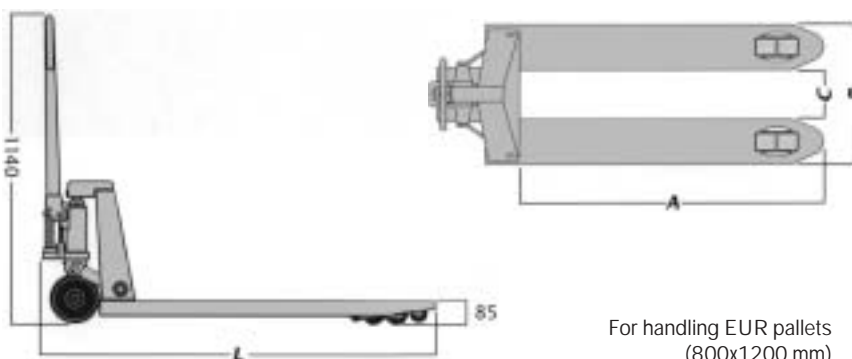

For handling EUR pallets
 (800x1200 mm)
 order No. 115.449 is most used.
 Measures in mm.

CE the product complies with the EC-directives

Made in Denmark

Stainless / Galvanised model

Capacity	2500 kg
Outside width	520 mm
Fork dimensions (standard)	1130 mm
Lowered height	85 mm
Lifted height	200 mm
Turning angle totally	220°
Pivoting steering wheels 2 pcs.	ø180x105 mm
Load wheels single 2 pcs.	ø82x105 mm
Load wheels bogie 4 pcs.	ø82x70 mm
Entry wheels 2 pcs.	ø60x20 mm
Wheel material	poly, nylon, rubber
Lifting height per stroke	11 mm
Lowering speed	adjustable
Weight (model S/-)	67 kg
Weight (model ST/-)	69 kg
Weight (model G/-)	69 kg
Weight (model GT/-)	71 kg

Standard measures

Order No.	Dim. A	Dim. B	Dim. C	Dim. L
115.449S/-	1130	520	200	0000
115.449ST/-	1130	520	200	0000
115.449G/-	1130	520	200	0000
115.449GT/-	1130	520	200	0000

S = Stainless G = Galvanised
 /- = Single roller T/- = Tandem roller

HPT 25 Stainless / Galvanised

We can also offer with the below mentioned, types of wheel:

- /1 Poly steering wheel and load wheel.
- /2 Poly steering wheel and nylon load wheel.
- /3 Nylon steering wheel and poly load wheel.
- /4 Nylon steering wheel and nylon load wheel.
- /5 Rubber steering wheel and nylon load wheel.
- /6 Rubber steering wheel and poly load wheel.
- /7 Rubber steering wheel and vulcollan load wheel.
- /8 Vulcollan steering wheel and vulcollan load wheel.



Svalhøjvej 15 · DK-3790 Hasle · Denmark
 Tel. (+45) 56 93 36 00 · Fax (+45) 56 93 36 03
 E-mail: info@almeborg.com · www.almeborg.com