



HIGHLIFTER STAINLESS ELECTRIC

Scissor Lifting Pallet Truck
- produced in Stainless steel.

This stainless high lifting hand pallet truck is specially produced for fisheries, slaughterhouse – and pharmaceutical industry. Places where there are high demands on hygiene, environment and sanitation.



As the highlifter is made of stainless steel, which means that it can withstand the majority of instances of the moisture and chemical cleaning.

For particularly aggressive environments, the pallet truck can be manufactured in acid resistant stainless steel.

When lowering of the load is controlled by a release handle, which enables the operator to accentuate the lowering speed to any level. The stainless highlifter have chassis, drawbar, shafts, pins, stamps and screws made of stainless steel. Lift cylinder, scissor legs and battery box is also made of stainless steel.



SPECIFICATIONS

Stability

A set of side stabilizers is automatically moved towards the floor, when the forks are lifted, and finally at full height they lift the steering wheels free of the floor.

In this position they act as a parking brake. The load wheel supports have been shaped in such a way that they almost touch the floor when forks at full height. They therefore secure the front stability further.


Hydraulic Pumps

The electro-hydraulic pump is furnished with a relief pressure valve. The pump unit is protected by a plastic cover.

The lift cylinder is welded directly onto the base plate of the pump, and the oil reservoir is welded around the lift cylinder, which means efficient tightness.

Optional versions

- Built-in charger
 - Outside fork spread: 480 mm & 685 mm.
 - Fork length: 700* to 2000 mm
 - Powered for compressed air
 - Powered for 220 V from mains
 - Parking brake
 - Automatic lift stops with photocell
 - Different color
 - Different wheel
- * The lift height is reduced at fork length less than 1200 mm

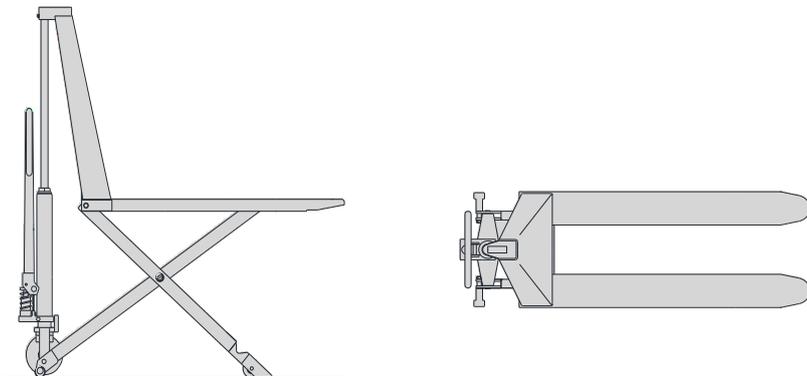

MODEL OA-379S/B

Capacity	1000 kg
Outside width	560mm
Fork length	1200mm
Fork height lowered	90 mm
Hydraulic motor	12V/ 0,8KW
Lifting speed unloaded	0,08 m/sec
Lifting speed loaded	0,05 m/sec
Battery	1x12 V
Battery capacity	50 Ah/5h
Battery weight	20 kg
Charger	12V /5A
Lowering speed	Variable
Steering wheels	Poly
Load wheels	Nylon
Weight without battery	135 kg
Weight with battery	155 kg



Svalhøjvej 15 . DK-3790 Hasle . Denmark
Tel. (+45) 56 93 36 00 . Fax (+45) 56 93 36 03
E-mail: info@almeborg.com .
www.almeborg.com

CE The product complies with the EC-directives

Subject to change in design Reserved. Made in Denmark